

TRANS-DATA


On-Board Weight Systems

Ray Fageol, President

50 Years Experience in the Trucking Industry



TRANS-DATA AIR PRESSURE TRANSDUCER FOR TRAILER AIR BAG SUSPENSION

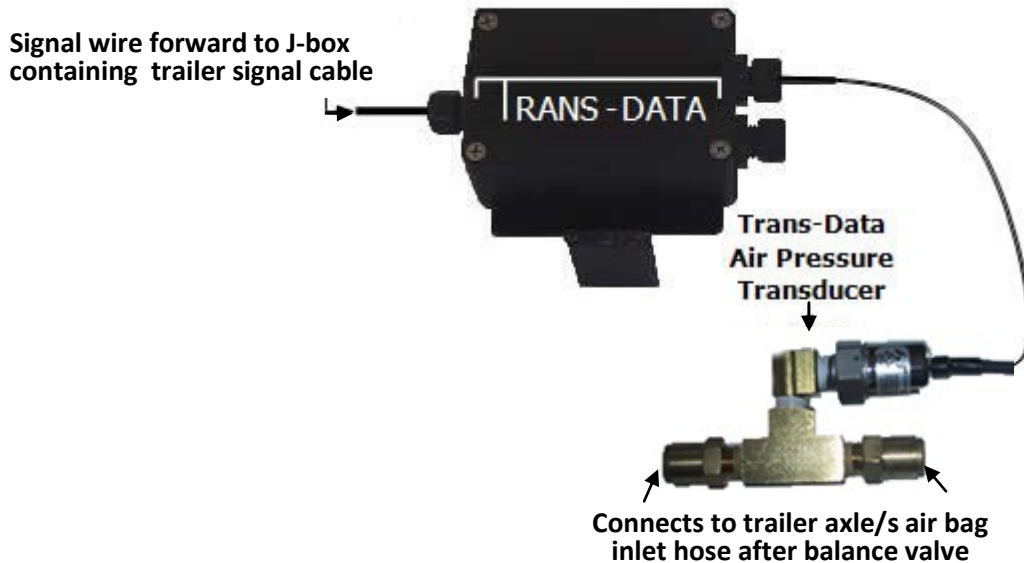

The installation of the junction box mounting bracket can be conveniently located close to the trailer axle air bag balance valve.

The Trans-Data Air Pressure Transducer, with its included fittings (furnished with the kit), can be easily installed in the air line, after the balance valve. The wires are then connected to the junction box terminal board through the water tight strain relief fitting.

The 35 foot signal wire (furnished with the kit) is connected to the other end of the junction box terminal board through the water tight strain relief fitting. This cable is then run forward to the Trans-Data junction box containing the trailer scale signal cord located at the front of the trailer.

This is all that is required for any trailer to communicate with any tractor if both are equipped with compatible Trans-Data Systems.

Total trailer installation time should be, approximately, 1½ hours.

NOTE: Air line quick connect fittings are brass (not plastic) and DOT approved.